

Inventor: Dean Scribner.
Serial No.

PATENT APPLICATION
Navy Case No. 83,682

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Dean Scribner

Serial No. Divisional of 09/635226

Examiner: Scott Getzow

Filed: August 9, 2000

Group Art Unit: 3762
Class 607

For: MICROELECTRONIC STIMULATOR ARRAY

PRELIMINARY AMENDMENT
IN SUPPORT OF REQUEST FOR DIVISIONAL APPLICATION
UNDER 37 C.F.R. SECTION 1.53(b)

Commissioner of Patents and Trademarks
Washington, DC 20231

Sir:

In response to the notice of allowance in the parent case serial number 09/635266, the applicant hereby files this divisional application with the following amendments. No new matter has been entered into the specification.

IN THE SPECIFICATION:

The Title of the application has been changed to "Microelectronic Stimulator Array For Stimulating Nerve Tissue"

Inventor: Dean Scribner.
Serial No.

PATENT APPLICATION
Navy Case No. 83,682

IN THE CLAIMS:

Cancel claims 1-4 as originally submitted.

Enter the following new claims 5-8.

5. A retinal prosthesis test device comprised of:

an external image source producing a video image;

a micro-cable for conducting the video through a patient's eye wall;

an electronic chip for demultiplexing the video image into a two-dimensional

(2-D) array of unit cells;

a nanochannel glass electrode array hybridized to said 2-D array of unit cells with
indium bumps and electrically connecting each unit cell to adjacent neural tissue;

an external electronic circuit board generating a biphasic pulse applied globally to
the unit cells through the micro-cable causing an electronic signal to be directed into a human eye
retina wherein it is converted to an electrochemical signal and transmitted within the eye to a
patient's optic nerve,

whereby said device stimulates neural tissue via a conformal surface achieved by
machining said nanochannel glass surface..

6. A device, as in Claim 5, wherein the nanochannel glass electronic array is comprised of a
hybridized to the microelectronic chip mounted on a ceramic chip carrier, all unit cells controlled

Inventor: Dean Scribner.
Serial No.

PATENT APPLICATION
Navy Case No. 83,682

by a series of row shift registers and column shift registers for directing the incoming video image to a predetermined unit cell.

7. A permanent retinal implant device comprised of:

a nanochannel glass electrode array and thinned electronic chip for receiving photons through a human iris and converting said photons to a two-dimensional (2-D) spatially discrete electrical signal residing in individual unit cells;

an electronic unit located externally on a patient for inductively transmitting electrical power and control signals to the electronic chip and nanochannel glass electrode array within the patients eye;

a biphasic pulse generated with on-chip electronic circuitry causing an electrical signal to be routed through the nanochannel glass electrode array and applied to adjacent retinal tissue in a human eye where it is converted into an electrochemical signal to be transmitted through retinal neurons within the eye to a patients optic nerve;

whereby said device stimulates neural tissue via a conformal surface achieved by machining said nanochannel glass surface..

8. A device, as in Claim 7, wherein the nanochannel glass electronic array is further comprised of an on-chip antenna for receiving the inductively transmitted signals and applying them selectively to an array of unit cells, digital electronics for controlling the application of the electrical to the retinal tissue, an on-chip power receiver for applying power to the array of unit

Serial No.

PATENT APPLICATION

Navy Case No. 83,682

generating the biphasic pulse, as well as row and column shift registers.

[illegible]

Inventor: Dean Scribner.
Serial No.


PATENT APPLICATION
Navy Case No. 83,682

REMARKS

Claims 1-4 were originally filed in this case. These claims are directed to a prosthesis test device and a retinal implant device. Upon discussions with the inventor, it is apparant from the original specification that both of these devices may be uses to stimulate neural tissue, and the claims have been amended to include this further feature. It is respectfully requested that the examiner pass these amended claims as presented in this divisional application to allowance.

Kindly charge any additional fees due or credit overpayment of fees to Deposit Account
Number 50-0281.

Respectfully submitted,

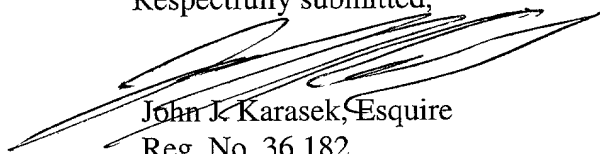

John J. Karasek, Esquire
Reg. No. 36,182
Associate Counsel (Patents)

Prepared by:
John Gladstone Mills III, Esquire
Reg. No. 49,054
(202) 404-1553
February 4, 2002

204020 "ET" 300T

Inventor: Dean Scribner.
Serial No.

PATENT APPLICATION
Navy Case No. 83,682

VERSION WITH MARKINGS TO SHOW CHANGES MADE

Cancel claims 1-4 as originally submitted.

Enter the following new claims 5-8.

5. A retinal prosthesis test device comprised of:

an external image source producing a video image;

a micro-cable for conducting the video through a patient's eye wall;

an electronic chip for demultiplexing the video image into a two-dimensional

(2-D) array of unit cells;

a nanochannel glass electrode array hybridized to said 2-D array of unit cells with
indium bumps and electrically connecting each unit cell to adjacent neural tissue;

an external electronic circuit board generating a biphasic pulse applied globally to
the unit cells through the micro-cable causing an electronic signal to be directed into a human eye
retina wherein it is converted to an electrochemical signal and transmitted within the eye to a
patient's optic nerve,

whereby said device stimulates neural tissue via a conformal surface achieved by
machining said nanochannel glass surface..

6. A device, as in Claim 5, wherein the nanochannel glass electronic array is comprised of a
hybridized to the microelectronic chip mounted on a ceramic chip carrier, all unit cells controlled
by a series of row shift registers and column shift registers for directing the incoming video
image to a predetermined unit cell.

204020 6743007

Table 1. Demographic characteristics of the study population	
Age (years)	50.0 ± 10.0
Gender	
Male	50.0%
Female	50.0%
Education	
High school	50.0%
University	50.0%
Occupation	
Unemployed	50.0%
Employed	50.0%
Marital status	
Married	50.0%
Single	50.0%
Divorced	50.0%
Widowed	50.0%
Health status	
Good	50.0%
Poor	50.0%
Smoking status	
Smoker	50.0%
Non-smoker	50.0%
Alcohol consumption	
Drinker	50.0%
Non-drinker	50.0%
Family size	
1-2	50.0%
3-4	50.0%
5-6	50.0%
7-8	50.0%
9-10	50.0%
11-12	50.0%
13-14	50.0%
15-16	50.0%
17-18	50.0%
19-20	50.0%
21-22	50.0%
23-24	50.0%
25-26	50.0%
27-28	50.0%
29-30	50.0%
31-32	50.0%
33-34	50.0%
35-36	50.0%
37-38	50.0%
39-40	50.0%
41-42	50.0%
43-44	50.0%
45-46	50.0%
47-48	50.0%
49-50	50.0%
51-52	50.0%
53-54	50.0%
55-56	50.0%
57-58	50.0%
59-60	50.0%
61-62	50.0%
63-64	50.0%
65-66	50.0%
67-68	50.0%
69-70	50.0%
71-72	50.0%
73-74	50.0%
75-76	50.0%
77-78	50.0%
79-80	50.0%
81-82	50.0%
83-84	50.0%
85-86	50.0%
87-88	50.0%
89-90	50.0%
91-92	50.0%
93-94	50.0%
95-96	50.0%
97-98	50.0%
99-100	50.0%
101-102	50.0%
103-104	50.0%
105-106	50.0%
107-108	50.0%
109-110	50.0%
111-112	50.0%
113-114	50.0%
115-116	50.0%
117-118	50.0%
119-120	50.0%
121-122	50.0%
123-124	50.0%
125-126	50.0%
127-128	50.0%
129-130	50.0%
131-132	50.0%
133-134	50.0%
135-136	50.0%
137-138	50.0%
139-140	50.0%
141-142	50.0%
143-144	50.0%
145-146	50.0%
147-148	50.0%
149-150	50.0%
151-152	50.0%
153-154	50.0%
155-156	50.0%
157-158	50.0%
159-160	50.0%
161-162	50.0%
163-164	50.0%
165-166	50.0%
167-168	50.0%
169-170	50.0%
171-172	50.0%
173-174	50.0%
175-176	50.0%
177-178	50.0%
179-180	50.0%
181-182	50.0%
183-184	50.0%
185-186	50.0%
187-188	50.0%
189-190	50.0%
191-192	50.0%
193-194	50.0%
195-196	50.0%
197-198	50.0%
199-200	50.0%
201-202	50.0%
203-204	50.0%
205-206	50.0%
207-208	50.0%
209-210	50.0%
211-212	50.0%
213-214	50.0%
215-216	50.0%
217-218	50.0%
219-220	50.0%
221-222	50.0%
223-224	50.0%
225-226	50.0%
227-228	50.0%
229-230	50.0%
231-232	50.0%
233-234	50.0%
235-236	50.0%
237-238	50.0%

PATENT APPLICATION
Navy Case No. 83,682

7. A permanent retinal implant device comprised of:

a nanochannel glass electrode array and thinned electronic chip for receiving photons through a human iris and converting said photons to a two-dimensional (2-D) spatially discrete electrical signal residing in individual unit cells;

an electronic unit located externally on a patient for inductively transmitting electrical power and control signals to the electronic chip and nanochannel glass electrode array within the patients eye;

a biphasic pulse generated with on-chip electronic circuitry causing an electrical signal to be routed through the nanochannel glass electrode array and applied to adjacent retinal tissue in a human eye where it is converted into an electrochemical signal to be transmitted through retinal neurons within the eye to a patients optic nerve;

whereby said device stimulates neural tissue via a conformal surface achieved by machining said nanochannel glass surface..

8. A device, as in Claim 7, wherein the nanochannel glass electronic array is further comprised of an on-chip antenna for receiving the inductively transmitted signals and applying them selectively to an array of unit cells, digital electronics for controlling the application of the electrical to the retinal tissue, an on-chip power receiver for applying power to the array of unit cells, a bias voltage supply for operating the electronic chip, and a biphasic pulse generator for generating the biphasic pulse, as well as row and column shift registers.